





DING BO

GZ Electromagnetic Vibration Feeder

Yield:5-600t/h
Feed particle size: 0-300mm

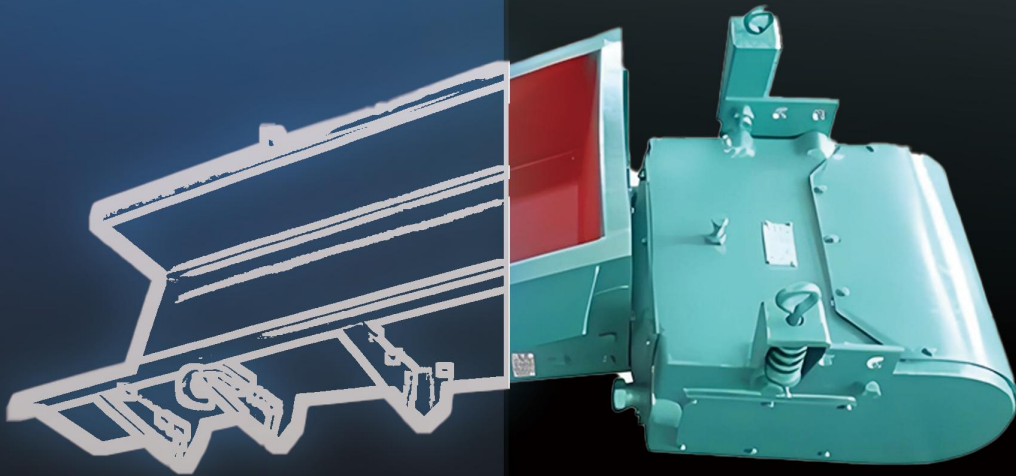

Craftsmanship
Shape the reputation of trust

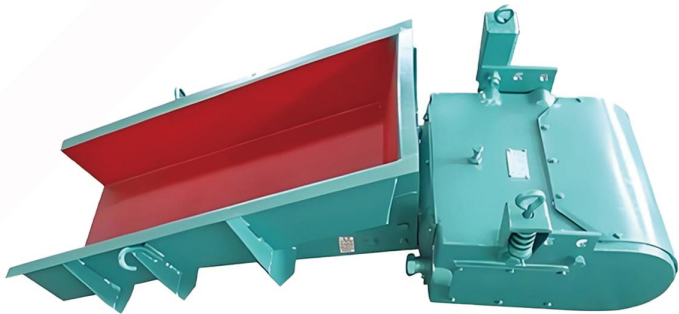

Yield: 5-600t/h

Feed particle size: 0-300mm

Power: 0.06-5.5kw


Application

Mining, metallurgy, coal, building materials, chemical, power, grain, machinery and other industries.

Raw Materials

Its main purpose is to uniformly and continuously or quantitatively feed block, granular, and powdered materials from storage silos or other storage equipment to the receiving equipment.



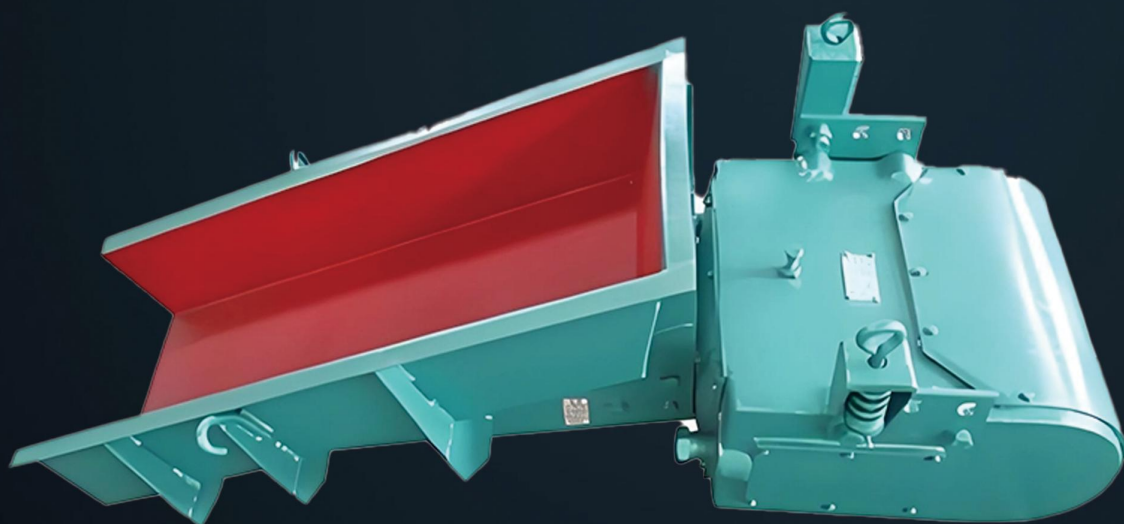



THE JAW CRUSHING RANGE

Type	Model	Production Rate (t/h)	Particle Size (mm)	Amplitude (mm)	Power (KW)	Voltage (V)	Current (A)	Matching Control Box	Working Current	Indicated Current
Basic Type	DZ 1	5	7	50	1.75	220	1.34	1	XKZ-5G2K	
	DZ 2	10	14	50		0.15		3.0	2.3	
	DZ 3	25	35	75		0.2		4.58	3.8	XKZ-10G2X
	DZ 4	50	70	100		0.45		8.4	7	XKZ-20G2X
	DZ 5	100	140	150		0.65		12.7	10.6	
	DZ 6	150	210	200	1.5	1.2	380	16.4	13.3	XKZ-20G3X
	DZ 7	250	350	250		3		24.6	20	XKS-100G3X
	DZ 8	400	560	300		5.5		39.04	32	
Enclosed Type	DZ 1F	4	5.6	40	1.75	0.06	220	1.34	1	XKZ-5G2X
	DZ 2F	8	11.2	40		0.15		3.0	2.3	
	DZ 3F	20	28	60		0.2		4.58	3.8	XKZ-10C5X
	DZ 4F	40	56	60		0.45		8.4	7	XKZ-20G2

Notice: Any change of PEW Jaw Crusher technical data shall not be advised additionally.



DING BO

Whatsapp:+8613817259661

E-mail:sales@dingbocrusher.net

Official website:<https://www.shdingbo.com>

Address:No.365, Chuanhong Road, Pudong New Area, Shanghai, China

